




specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 hours	Surge Protection	Ambient Temp (F)	Power Factor	UL listing	THC	Beam Angle	Enclosed Fixture Rated
80 W	100 - 277 V ⚡	> 80	clear polycarbonate	aluminum	50,000	4 KV built-in	-40° - 113°	> 0.9	wet location	< 20%	180°	yes

select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy
GI-SAL-C400-UL4	5000K	EX39	11,200	140 lm / W

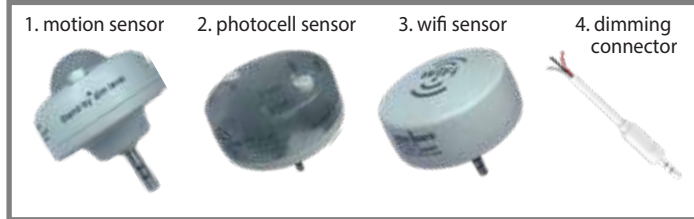

other

Dimensions	Warranty	Gross Weight	Case QTY
8.74" (L) x 4.37" (D)	6 years	3.53 lbs	6 pcs


add your accessories*

Accessories Part Number	Description
1. GI-ACC-MBMS	motion sensor
2. GI-ACC-MBPC	photocell
3. GI-ACC-MBWF	wifi sensor
4. GI-ACC-MBDC	dimming connector

*optional

Features

- ▶ Waterproof and flame retardant casing
- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- ▶ Shatterproof
- ▶ Foldable wings and rotateable base

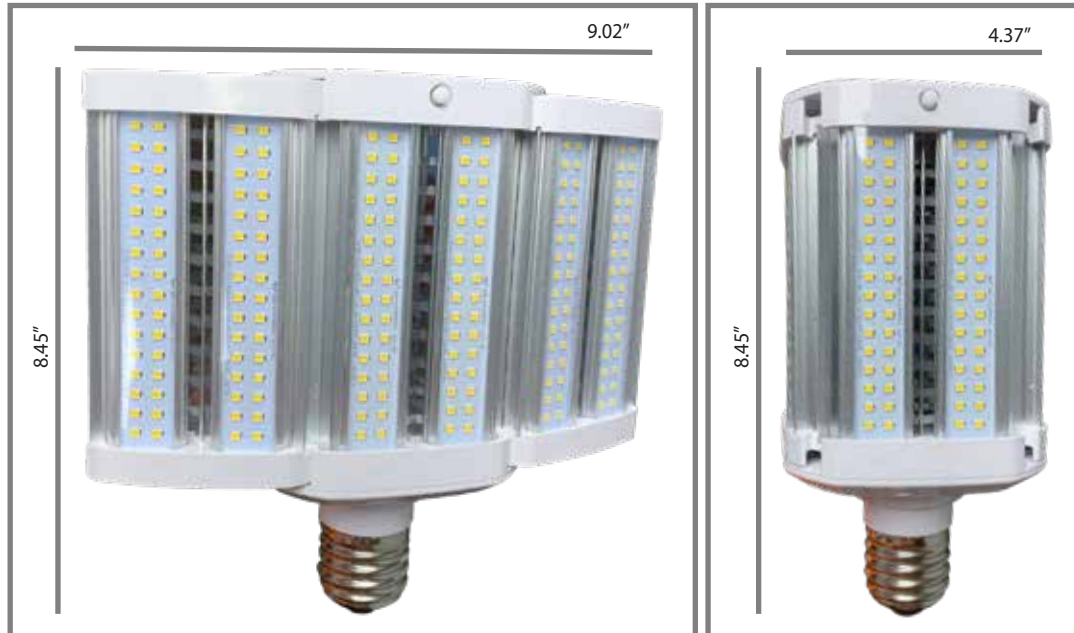

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

